



Bistrot 4T Classic

Electrical Supply

CODE: 925904120

Trays	4T 40x60 46x66 cm
Outside dimension	850 L x 930 P x 670 H mm
Tray distance	81 mm
Power	8 kW
Weight	68 Kg
Max temperature	270° C
Power supply	400 V ~ 3PH + N + PE 400 V ~ 2PH + N + PE 230 V ~ 3PH + PE 230 V ~ 1PH + N + PE 50-60 Hz

Equipment

Led illumination BakePOINT Multipoint core probe BakeAIR multi-fan system Blue LED for chamber cleaning check Double low emissive glass High-performance thermal insulation Five fan speeds and semi-static cooking Nine cooking modes Automatic chimney opening BakeDRY Program blocking with password Rounded baking chamber Modularity Automatic control of dry/steam balance inside the **CE** Certificate $Steam\ control\ in\ percentage\ Bake STEAM$ chamber Automatic control of the cooking level and load Multi-timer function for multiple and mixed cooking Storage, viewing* and exportation of cooking data (haccp) Customized programs mode Manual mode Preset programs mode ETL/NSF certification **EAC** certification Automatic preheating Cooling program Delayed start programming Delayed cooking programming Pre-loaded and online cookbook Automatic detection and errors report Overlap option Fan inversion, speed control and motor brake Openable inner glass for easy cleaning

Options


Heart probe MultiBakePOINT BakeCLEAN automatic washing system
Left door opening Data logger for USB connection


Safety rinse






Bistrot 4T Classic Electrical Supply



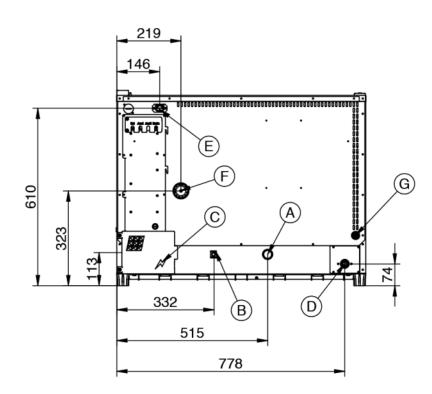

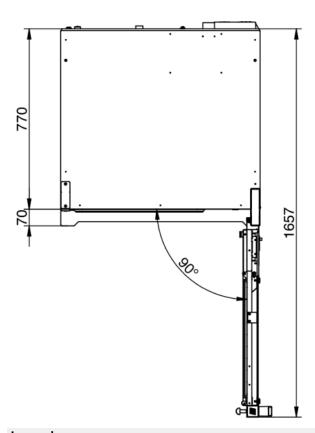

Legend

- A Drain liquid Ø 30mm
- B Equipotential terminal comb
- C Electric supply
- D Water inlet 3/4"
- E Extracting hood supply
- F Steam exhaust Ø 50mm


G - Inlet for washing kit Ø 8mm






Bistrot 4T Classic Electrical Supply

Supply and Connections

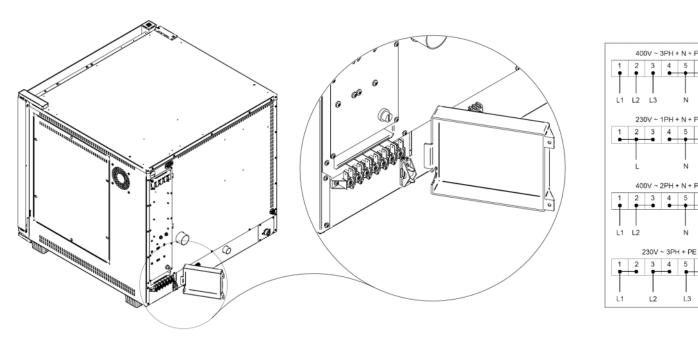

Packaging



Packing size: 920 L x 1000 P x 650 H mm

Net weight: 68 Kg

Gross weight: 85 Kg