



Bistrot 6T Classic

Electrical Supply

CODE: 925907120

Trays	6T 40x60 46x66 cm
Outside dimension	850 L x 930 P x 830 H mm
Tray distance	81 mm
Power	10 kW
Weight	83 Kg
Max temperature	270° C

Power supply

400 V ~ 3PH + N + PE 400 V ~ 2PH + N + PE 230 V ~ 3PH + PE 230 V ~ 1PH + N + PE 50-60 Hz

Equipment

Led illumination	BakePOINT Multipoint core probe	BakeAIR multi-fan system
Double low emissive glass	High-performance thermal insulation	Blue LED for chamber cleaning check
Five fan speeds and semi-static cooking	Nine cooking modes	Automatic chimney opening BakeDRY
Program blocking with password	Rounded baking chamber	Modularity
CE Certificate	Automatic control of dry/steam balance inside the chamber	Steam control in percentage BakeSTEAM
Automatic control of the cooking level and load	Multi-timer function for multiple and mixed cooking	Storage, viewing* and exportation of cooking data (haccp)
Customized programs mode	Manual mode	Preset programs mode
ETL / NSF certification	EAC certification	Automatic preheating
Cooling program	Delayed start programming	Delayed cooking programming
Pre-loaded and online cookbook	Automatic detection and errors report	Overlap option
Openable inner glass for easy cleaning	Fan inversion, speed control and motor brake	
Options		
Heart probe MultiBakePOINT Left door opening	BakeCLEAN automatic washing system Data logger for USB connection	Safety rinse







PROFESSIONAL OVENS - BISTROT CONVECTION OVENS

Bistrot 6T Classic

Electrical Supply

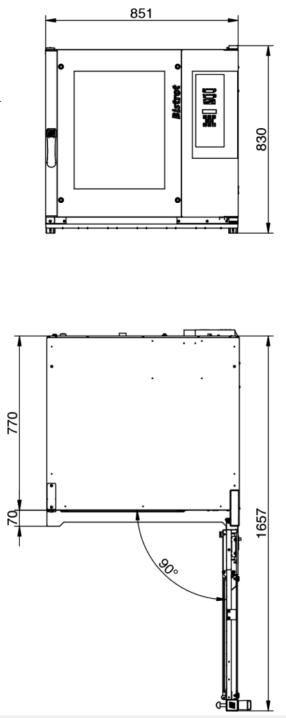

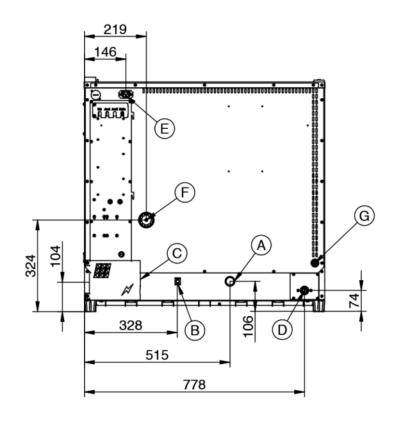

Legend

- A Drain liquid Ø 30mm
- B Equipotential terminal comb
- C Electric supply
- D Water inlet 3/4"
- E Extracting hood supply
- F Steam exhaust Ø 50mm

G - Inlet for washing kit Ø 8mm






PROFESSIONAL OVENS - BISTROT CONVECTION OVENS


Bistrot 6T Classic

Electrical Supply

Supply and Connections

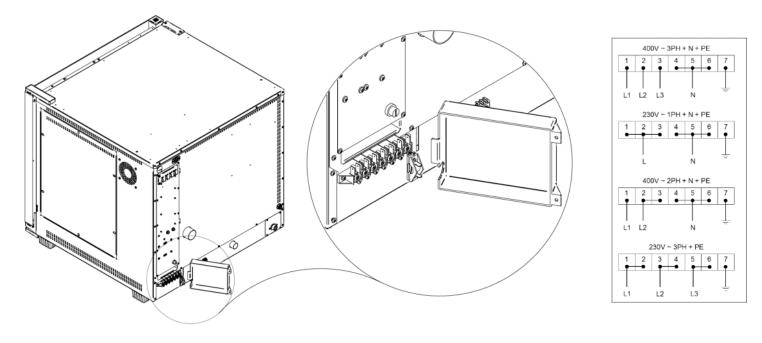

Packaging



Packing size:	920 L x 1000 P x 980 H mm	
Net weight:	83 Kg	
Gross weight:	101 Kg	

