



Rack 16T Vision

Electrical Supply

CODE: 925915230

Trays	16T 40x60 46x66 cm
Outside dimension	850 L x 963 P x 1860 H mm
Tray distance	80 mm
Power	32 kW
Weight	177 Kg
Max temperature	270° C

Power supply

400 V ~ 3PH + N + PE 400 V ~ 2PH + N + PE 230 V ~ 3PH + PE 230 V ~ 1PH + N + PE 50-60 Hz

Equipment

Display touch screen Double low emissive glass Blue LED for chamber cleaning check Nine cooking modes Rounded baking chamber

Steam control in percentage BakeSTEAM Time-programmable steam injection Customized programs mode EAC certification Delayed start programming Pre-loaded and online cookbook Fan inversion, speed control and motor brake **Options**

Options

BakeHIN vacuum core probe BakeCLEAN automatic washing system Extendable height-adjustable feet kit Led illumination High-performance thermal insulation Set-up for BakeHIN vacuum core probe Automatic chimney opening BakeDRY CE Certificate

Automatic control of the cooking level and load Manual steam injection Manual mode Automatic preheating Delayed cooking programming Automatic detection and errors report

Ethernet connection and wi-fi set-up BakeNET Safety rinse

BakeAIR multi-fan system USB connection Five fan speeds and semi-static cooking Program blocking with password Automatic control of dry/steam balance inside the chamber Multi-timer function for multiple and mixed cooking Storage, viewing* and exportation of cooking data (haccp) Preset programs mode Cooling program Cooking chamber automatic cooling Openable inner glass for easy cleaning

Heart probe MultiBakePOINT Left door opening







PROFESSIONAL OVENS - BISTROT CONVECTION OVENS

Rack 16T Vision

Electrical Supply

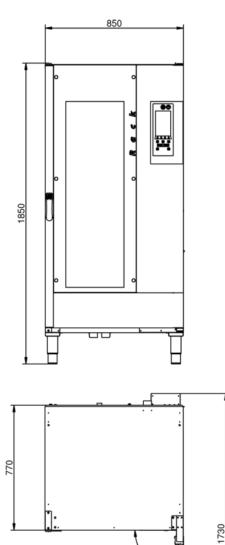

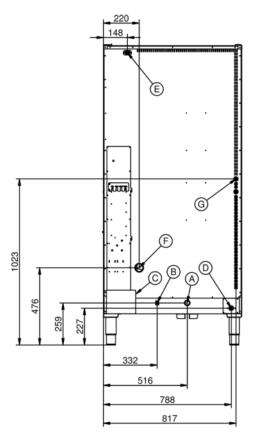

Legend

- A Drain liquid Ø 30mm
- B Equipotential terminal comb
- C Electric supply
- D Water inlet 3/4"
- E Extracting hood supply
- F Steam exhaust Ø 50mm

G - Inlet for washing kit Ø 8mm H - Depressurizer Ø 12mm






PROFESSIONAL OVENS - BISTROT CONVECTION OVENS


Rack 16T Vision

Electrical Supply

Supply and Connections

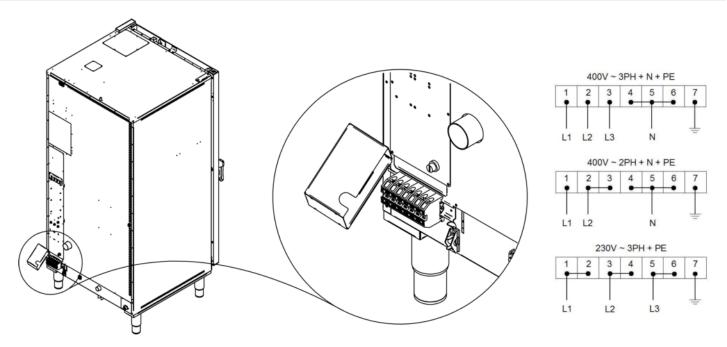

Packaging



Packing size:	950 L x 1040 P x 2090 H mm
Net weight:	177 Kg
Gross weight:	233 Kg

